


DC Motors

D3650-2868


Issue 02

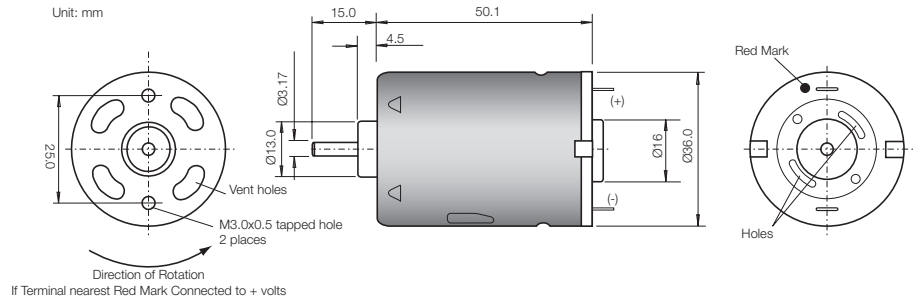

| Model Number | Performance | | | | | | | | | |
|--------------|-------------|-----------|-----------|--------------------|-----------|------------|----------|------------|-----------|-------------|
| | Volts V | No Load | | Maximum Efficiency | | | | Stall | | Max Power W |
| | | Speed rpm | Current A | Speed rpm | Current A | Torque mNm | Output W | Torque mNm | Current A | |
| D3650-2868 | 12 | 5700 | 0.30 | 4780 | 1.28 | 16.9 | 8.5 | 103.9 | 6.54 | 15.3 |

Performance characteristics and general specification are measured from sample motor.

Characteristics

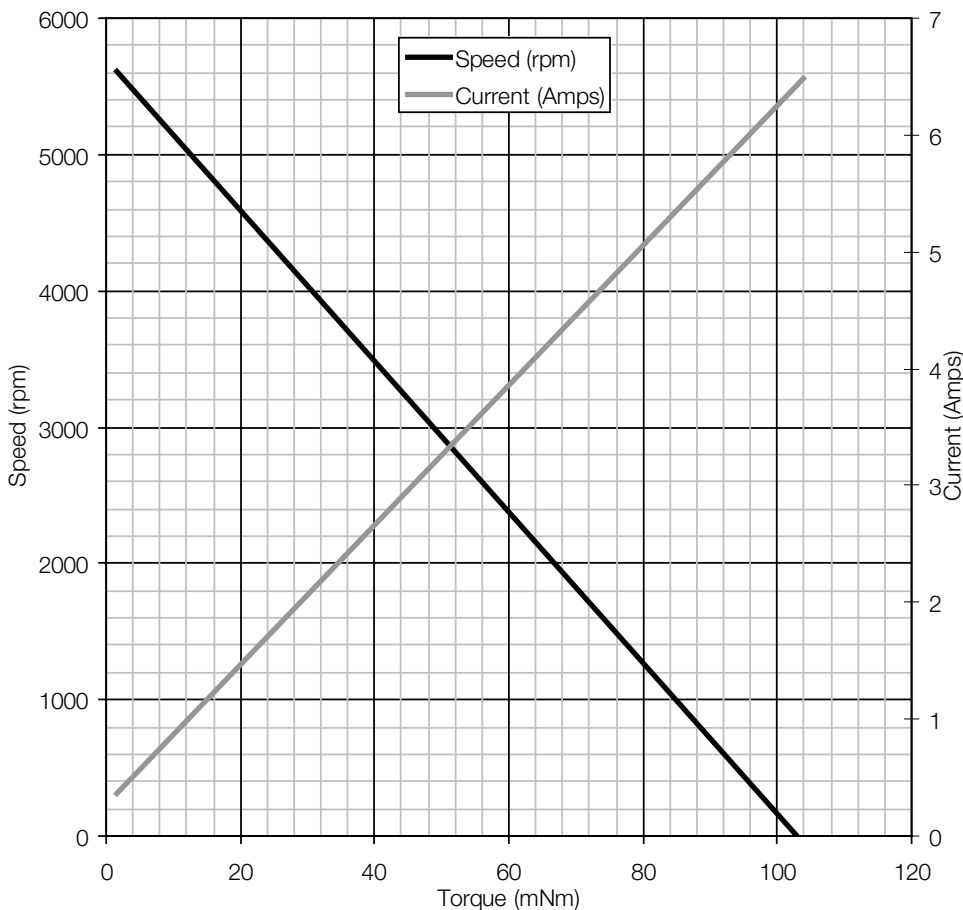

General Specification

| | |
|-----------------------|----------------|
| Bearings | Sintered |
| Brushes | Carbon |
| Rotation | Bi-directional |
| Number of poles | 5 |
| Operating voltage | 8 V to 18 V |
| Nominal resistance | 3 Ω |
| Typical detent torque | 6 mNm |
| Suppression | None |
| Weight | 155 g |

Contact:

www.rotalink.com
info@rotalink.com
T: +44 (0)1460 72000
F: +44 (0)1460 74278

Rotalink Limited
Cropmead, Crewkerne
Somerset TA18 7HQ, UK

www.rotalink.com