


DC Motors

D5269-5030

Issue 01

Rotalink


Miniature Motors, Transmission and Control

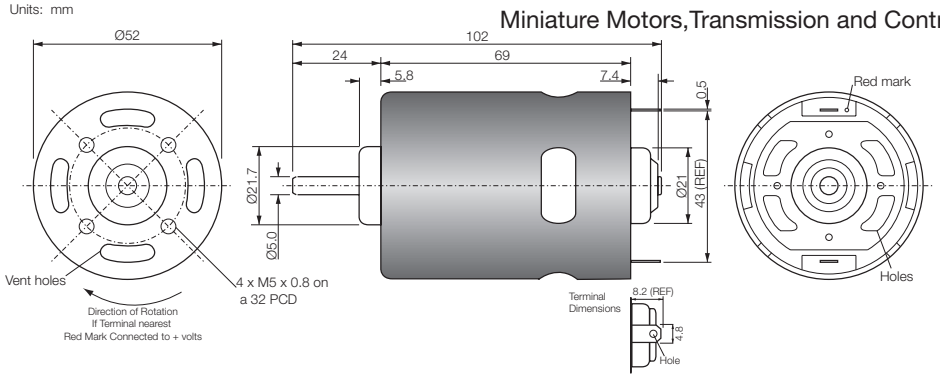

Model Number	Performance									
	Volts V	No Load		Maximum Efficiency				Stall		Max Power W
		Speed rpm	Current A	Speed rpm	Current A	Torque mNm	Output W	Torque mNm	Current A	
D5269-5030	24	8886	0.78	7376	5.76	125.4	96.8	885.6	37.78	206.0

Performance characteristics and general specification are measured from sample motor.

Characteristics

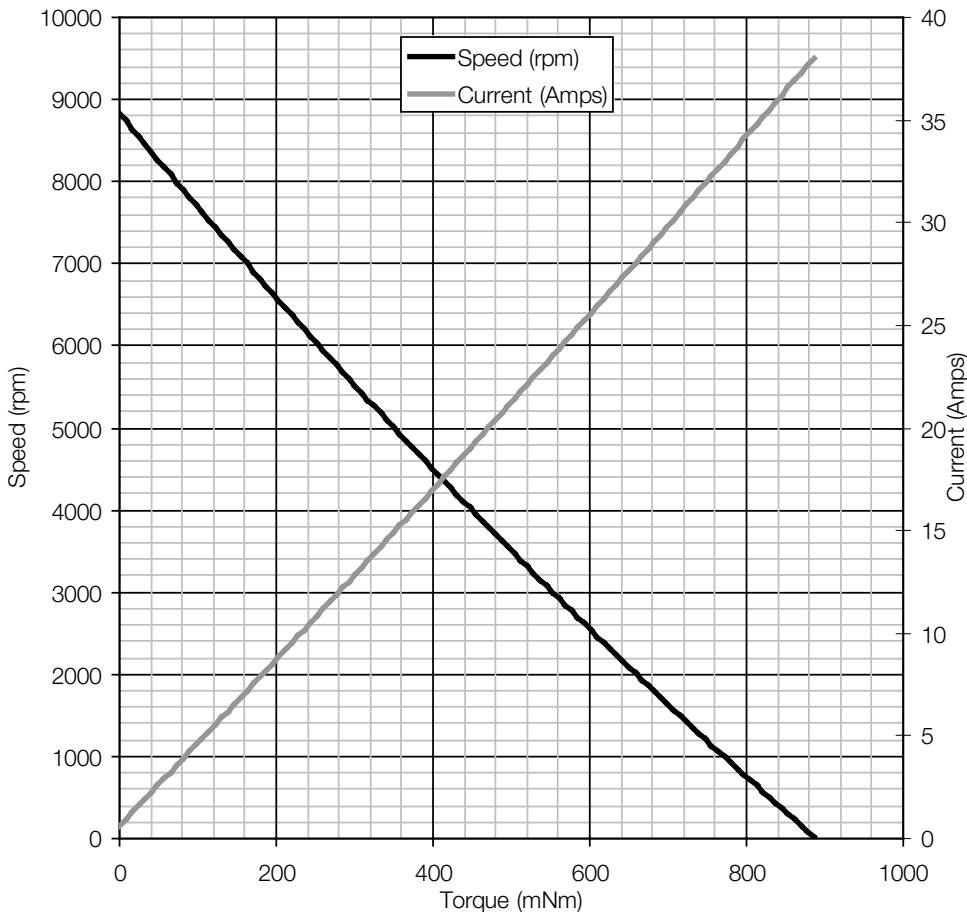

General Specification

Bearings	Sintered
Brushes	Carbon
Rotation	Bi-directional
Number of poles	7
Operating voltage	12 V to 24 V
Nominal resistance	10 Ω
Typical detent torque	20 mNm
Suppression	None
Weight	455 g

Contact:

www.rotalink.com
 info@rotalink.com
 T: +44 (0)1460 72000
 F: +44 (0)1460 74278

Rotalink Limited
 Cropmead, Crewkerne
 Somerset TA18 7HQ, UK

www.rotalink.com